

TUBO LED ORIZZONTALE

ILLUMINAZIONE PER IL SETTORE AVICOLO

MADE IN ITALY

TUBO LED ORIZZONTALE




- Tubo in policarbonato AUTOESTINGUENTE e resistente all'ammoniaca
- Alta efficienza
- Installazione rapida e semplice tramite connettori PLUG and PLAY da ambo i lati
- Grado di protezione IP67 per acqua e polvere
- Lunga vita del LED (100.000 ore)
- Possibilità di regolazione di intensità luminosa da 0 a 100%
- Disponibile in tutte le gradazioni di colore del LED
- Lunghezze dei tubi e dei cavi PERSONALIZZABILI
- **MADE IN ITALY**
- Certificazione CE
- Possibilità di gestione in WIRELESS



MODEL	INTERNO GABBIA 120°			INTERNO GABBIA 180°		SOTTOGABBIA
COLOR TEMPERATURE	3000°K / 4000°K			3000°K / 4000°K		3000°K / 4000°K
INPUT POWER	1,86W	1,92W	3,36W	1,92W	3,84W	10,8W
LUMINOUS FLUX 3000°K	271Lm	275Lm	420Lm	205Lm	410Lm	1389Lm
LUMINOUS FLUX 4000°K	279Lm	282Lm	453Lm	205Lm	410Lm	1455Lm
TUBE LENGTH	900mm	1300mm	1800mm	1300mm	1800mm	1400mm
TOTAL LENGTH	940mm	1340mm	1840mm	1340mm	1840mm	1440mm
SUPPLY VOLTAGE	24VDC			24VDC		24VDC
SUPPLY FREQUENCY	50-60 Hz			50-60 Hz		50-60 Hz
COLOR RENDERING INDEX (CRI)	>83 (>93 on request)			>83 (>93 on request)		>83 (>93 on request)
WORKING TEMPERATURE	-10°C ÷ +40°C			-10°C ÷ +40°C		-10°C ÷ +40°C
LED BOARDS NUMBER	2	2	4	2	4	1
NETWORK CONNECTORS	CO-MOULDED CONNECTORS MXX FXX			CO-MOULDED CONNECTORS MXX FXX		CO-MOULDED CONNECTORS MXX FXX
IP	67			67		67



CURVE FOTOMETRICHE

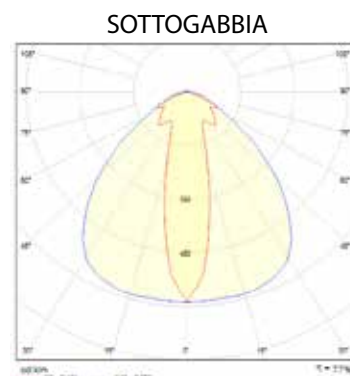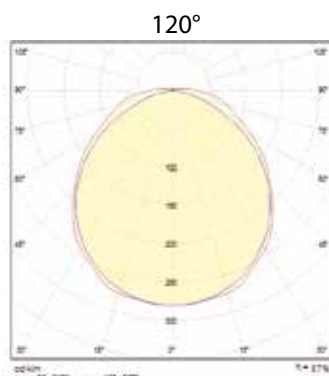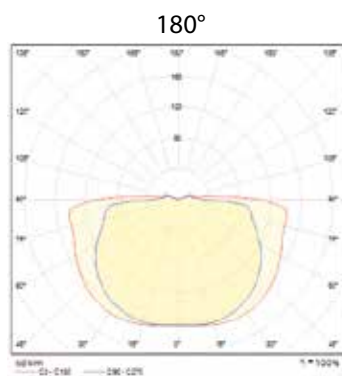

Via Licinio Ferretti 5A - 43126 Parma
 Tel. +39 0521 1564103 - Fax. +39 0521 1850681
www.xlitepoultryled.it

CEI EN 62471 RGO